



H220 : Zeer licht ontvlambaar gas.
 H222: Zeer licht ontvlambare aerosol.
 H280: Bevat samengeperst gas; kan ontploffen bij verhitting.
 H225: Licht ontvlambare vloeistof en damp. Voorzorgsmaatregelen (SEA)
 P210: Verwijderd houden van hitte/vonken/open vuur/hete oppervlakken. Niet roken.
 P211: Niet in open vuur of op andere ontstekingsbronnen spuiten.
 P251: De container niet doorboren of verbranden, ook niet na gebruik.
 P331: Geen braken opwekken.
 P301 + P310: NA INSLIKKEN: alarmcentrale 112 of een arts raadplegen.
 P403: Op een goed geventileerde plaats bewaren.
 P410 + P412: Beschermen tegen zonlicht en niet blootstellen aan temperaturen boven 50°C/122°F.



H220 : Extremely flammable gas.
 H222: Extremely flammable aerosol.
 H280: Contains compressed gas; may explode when heated.
 H225: Highly flammable liquid and vapor. Precautions (SEA)
 P210: Keep away from heat/sparks/open flames/hot surfaces. Do not smoke.
 P211: Do not spray into open flame or other sources of ignition.
 P251: Do not pierce or burn container, even after use.
 P331: Do not induce vomiting.
 P301 + P310: IF INHALED: Call emergency 112 or a doctor.
 P403: Keep in a well-ventilated place.
 P410 + P412: Protect from sunlight and do not expose to temperatures exceeding 50°C/122°F



3

Waarschuwing/Danger

GHS02 GHS04




WILDCARCARE

AIRCO

BOMB

NEW CAR SMELL

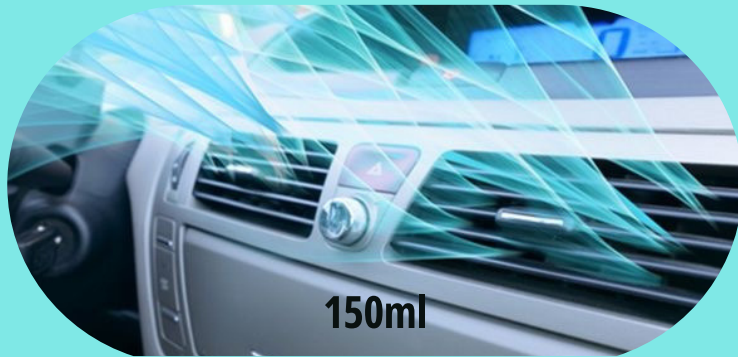

150ml



GEbruikersAANWIJZING

Laat de motor van de auto stationair draaien. Zet vervolgens uw airco op de koudste stand met de maximale ventilatorstand. Zet buitenventilatie uit. Plaats de Aircobomb tussen de stoelen (bijvoorbeeld op de armluning) en duw de verstuur in. Stap uit de auto en sluit alle deuren en ramen. Zodra de Aircobomb geheel op is, wacht nog 5 minuten. Zet de motor af en laat de auto 10 minuten luchten. Het is aan te raden om dit proces onderdeel van uw periodieke onderhoud te maken.



USER INSTRUCTIONS

Let the car's engine idle. Set your air conditioner to the coldest setting with the maximum fan setting. Turn off outside air circulation. Place the Aircobomb between the seats (e.g. on the armrest) and push in the nozzle. Get out of the car and close all doors and windows. Once the Aircobomb is completely empty, wait another 5 minutes. Turn off the engine and let the car air out for 10 minutes. It is recommended to make this process part of your periodic maintenance.

Importer: WildCommerce
 Kasteel Daelenbroeckstraat 34
 6043 XR Roermond Netherlands

WildSteeringWheels | WildCarCare

www.wildsteeringwheels.com

